Prima 4

ID CARD PRINTER SPECIFICATIONS

Warranty*	3 years UltraCoverPlus warranty and support which includes full printhead coverage and free loaner service – North America, EU and other selected territories. Elsewhere 12 months limited warranty.
Print Speed	YMCK with transfer to card: up to 80 cards per hour single-sided.
Card Capacity	100 card input and output hoppers.
Printhead	Simple field replaceable unit.
PC interfaces	USB (Ver2.0) Full-Speed (12Mbps) and Hi-Speed (480Mbps) 10BASE-T/100BASE-TX Ethernet, both included as standard.
Printer Drivers	Windows 8, Windows 2000 Professional (SP4), XP (SP2, SP3), Vista (SP1), Windows Server 2003 R2 SP2, Server 2008, 7.
Security Features	Holographic laminates (Requires lamination module) and UV film options.
Cleaning	Removable cleaning roller cassette.
Dimensions	13.5" width x 12.6" height x 13" length (343mm width x 320mm height x 330mm length).
Weight	34.1lbs (15.5kg).
Operating Conditions	59 to 86°F (15 to 30°C); 35% to 70% non-condensing.
Dye Film	Set of 1 YMCK dye film + 1 retransfer film - 1000 prints - Part No Prima 431.
Dye Film	Set of 1 YMCK dye film + 1 retransfer film - 1000 prints - Part No Prima 431 . YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433 .
Dye Film	
Dye Film Retransfer Film	YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433.
	YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434.
Retransfer Film	YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433 . YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434 . Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436 .
Retransfer Film Laminates	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates.
Retransfer Film Laminates	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates.
Retransfer Film Laminates Card Thickness/Stock	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates. 0.25mm to 1.0mm (10mil to 40mil) / PVC, ABS, PET, PVH, and Polycarbonate ISO Standard CR80 sized cards.
Retransfer Film Laminates Card Thickness/Stock Prima 4 Uno	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates. 0.25mm to 1.0mm (10mil to 40mil) / PVC, ABS, PET, PVH, and Polycarbonate ISO Standard CR80 sized cards. Single-sided - Part No Prima 401.
Retransfer Film Laminates Card Thickness/Stock Prima 4 Uno	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates. 0.25mm to 1.0mm (10mil to 40mil) / PVC, ABS, PET, PVH, and Polycarbonate ISO Standard CR80 sized cards. Single-sided - Part No Prima 401.
Retransfer Film Laminates Card Thickness/Stock Prima 4 Uno	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates. 0.25mm to 1.0mm (10mil to 40mil) / PVC, ABS, PET, PVH, and Polycarbonate ISO Standard CR80 sized cards. Single-sided - Part No Prima 401.
Retransfer Film Laminates Card Thickness/Stock Prima 4 Uno Prima 4 Duo	 YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433. YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434. Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436. Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates. 0.25mm to 1.0mm (10mil to 40mil) / PVC, ABS, PET, PVH, and Polycarbonate ISO Standard CR80 sized cards. Single-sided - Part No Prima 401. Double-sided - Part No Prima 402.
Retransfer Film Laminates Card Thickness/Stock Prima 4 Uno Prima 4 Duo	YMCKK 750 prints (Full-color printing on one side and black on reverse side) - Part No Prima 433 . YMCK-UV 750 prints (Full-color and UV panel) - Part No Prima 434 . Retransfer film 1000 prints. (<i>Retransfer film must be paired with dye film for printing</i>) - Part No Prima 436 . Thin, 0.5 mil and 1 mil laminates available. Clear and holographic laminates. 0.25mm to 1.0mm (10mil to 40mil) / PVC, ABS, PET, PVH, and Polycarbonate ISO Standard CR80 sized cards. Single-sided - Part No Prima 401 . Double-sided - Part No Prima 402 .
	Print Speed Card Capacity Printhead PC interfaces Printer Drivers Security Features Cleaning Dimensions Weight

YOUR ID CARD PRINTER



Edge to edge Highest photo-quality images, printed right over the edge of the card.



OPTIONS

Encoding Magstripe - Encoder for access control, time and attendance.

Chip Contact - Programming facility for smart cards. Contactless - Philips MIFARE[®], DESFire[®], HID: iCLASS[®], Legic[®] options available.

Duplex Prints on both sides (Prima 4 Duo).



Lamination For added durability and holograms, an inline card laminator is available.



Magicard is a trademark of Ultra Electronics Limited. Windows 2000, XP and Vista are trademarks of Microsoft Corporation. The information contained in this document reflects the current state of design and we reserve the right to change the specification without notice or obligation.

Prima44PPUSLTR issue 1.07





www.alphacard.com (877) 232-6799

Utre MAGICARD Secure ID card printers

Prima 4



The highest print quality

The reverse-transfer Prima is ideal for producing top quality, durable cards.

The image quality of the printed card is comparable to mass produced offset litho printed cards, but with the advantage that each card can be personalized.

Features and options



Options

Ultra Electronics Card Systems

Ultra ELECTRONICS



The Prima is ideal for:

- Driving Licenses
- Airport Cards
- National ID
- Banking/Financial Cards
- Bureau Services

Free 3 year warranty and support



The Prima is supplied with a free, 3 year warranty and support including loaner service, **plus** life-time printhead cover*. (Available in the EU, North America and other selected territories)

PROFESSIONAL SERIES



The innovative Prima 4 Reverse Transfer printing technology

The Prima 4 printer's reverse transfer printing technology delivers superb print guality and is the ideal choice for printing technology embedded cards, as well as high volume batch printing.


The process works like this:

The ID card image is printed from the YMCK dye film onto a clear retransfer film in a "reverse image", and is then laminated onto the card surface. The printed image is protected from scratching and fading by the clear film layer. In comparison, dye sublimation printers transfer the dyes directly onto the card surface using thermal transfer dye diffusion technology, followed by a thin acrylic varnish. Both methods use YMCK dye films, but the reverse transfer method uses an additional polyester transfer film.

The advantages of Reverse Transfer technology are:

High-capacity YMCK dye film together with the separate re-transfer film provides 1000

- Amazing print quality
- The ability to print cards with uneven surfaces such as smart and proximity cards
- True over-the-edge printing on the card
- The ability to print onto non-PVC cards like ABS, PET, PVH and Polycarbonate

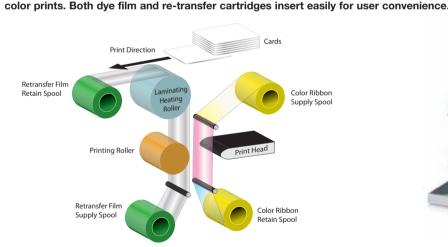



Enhanced encoding options

The new Prima printers are optionally equipped with smart card encoders, which support the following encoding technologies:

- Philips: MIFARE®, DESFire®
- HID: iCLASS®
- Legic®
- Contact Chip



Single-sided or double-sided lamination

The inline laminator integrates exclusively with the Magicard Prima. Available in single or double-sided, it delivers an outstanding lamination result with all available options. Regardless of whether the application calls for thin holographic film, or thicker overlaminate patches, the result is always superb.

Front loading of the lamination rolls is convenient and user friendly. The inline lamination unit is user programmable. Temperature and speed settings can be adjusted via the front panel display for optimum results with varying card types including PVC, PVH, ABS, 100% PET and even Polycarbonate.

Lamination materials include thin holographic overlays and 0.5 mil and 1 mil patch laminates available in clear or custom formats.

The Magicard Prima's unique portrait orientation lamination mode allows for fast operation.

ONLY Magicard offers you all the following valuable features:

- 3 years UltraCoverPlus warranty and support (EU, North America and selected other territories).
- Wide range of encoding options Philips Mifare, Desfire, HID iClass, Legic and Contact Chip.
- USB 2.0 and Ethernet as standard.



- Inline lamination options.
- Extensive choice of field upgrades.
- Auto dye film detection.
- Anti-bend card output.

Visit www.magicard.com for more information.